

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(43) International Publication Date
8 January 2004 (08.01.2004)

PCT

(10) International Publication Number
WO 2004/004408 A1(51) International Patent Classification⁷: **H04R 1/02**,
H04M 1/02, 1/03(21) International Application Number:
PCT/EP2003/006724

(22) International Filing Date: 26 June 2003 (26.06.2003)

(25) Filing Language: English


(26) Publication Language: English

(30) Priority Data:
02077565.6 1 July 2002 (01.07.2002) EP
60/394,404 8 July 2002 (08.07.2002) US(71) Applicant (for all designated States except US): **SONY
ERICSSON MOBILE COMMUNICATIONS AB**
[SE/SE]; S-221 88 LUND (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ERIXON, Mats**[SE/SE]; Rektorsvägen 12, S-237 31 Bjärred (SE).
SCHACK, Göran [SE/SE]; Fädriften 95, S-296 33 Åhus
(SE). **FROHLUND, Stig** [SE/SE]; Viktoriagatan 21,
S-281 38 Hässleholm (SE). **SIMONSSON, Olof** [SE/SE];
Mariedalsvägen 44, S-217 45 Malmö (SE).(74) Agents: **LINDBERG, Olle** et al.; Albihns Malmö AB,
P.O. Box 4289, S-203 14 Malmö (SE).(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG,
US, UZ, VC, VN, YU, ZA, ZM, ZW.(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

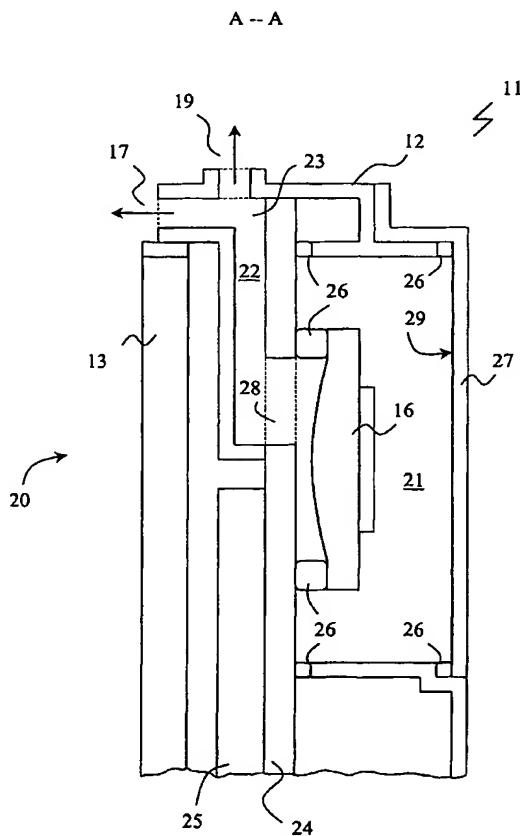(54) Title: **SPEAKER ARRANGEMENT FOR COMMUNICATION TERMINAL**

(57) Abstract: A communication terminal (11) comprising a housing (12) carrying therein a radio antenna element (27), a speaker (16), and a chamber (21) acting as an electromagnetic resonance cavity for the antenna and as an acoustic resonance cavity for the speaker. Said speaker is mounted inside said chamber and is coupled to the outside of said housing through a sound channel (22). The terminal comprises a user interface (13, 14) on a front side (20) of the housing, and in that said speaker is placed behind said user interface as seen from said front side, with the sound channel extending from a channel inlet (28) at said speaker to a channel front outlet (17) at said front side.



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

Declarations under Rule 4.17:

- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- of inventorship (Rule 4.17(iv)) for US only

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

SPEAKER ARRANGEMENT FOR COMMUNICATION TERMINAL

Field of the invention

The present invention relates generally to a communication terminal
5 comprising an antenna for wireless communication purposes, and a speaker for conveying audio information to a user of the communication terminal. More specifically the invention relates to a communication terminal wherein such a speaker is arranged inside the resonance chamber of said antenna.

10 Background

The mobile phone industry has had an enormous development both regarding quality of service and transmission capabilities, as well as the technology for producing advanced communications terminals. In only a couple of decades the communication systems have gone from analogue to digital, and at the same time
15 the dimensions of the communication terminals have gone from briefcase size to the pocket size phones of today. Still today, mobile phones are getting smaller and smaller and the size is generally considered to be an important factor for the end customer: The development in electronics has made it possible to miniaturise the components of the terminals, at the same time making the terminals capable of
20 performing more advanced functions and services. The development of new transmission schemes, the so-called 3rd generation mobile system standing at the door and the 4th generation to be expected maybe ten years later, also provides the possibility to convey more advanced data to the wireless communication terminals, such as real time video.

25 In order to benefit from the capabilities of the transmission system, the future generation of phones will have a large display in order to perform multimedia input and output, and the picture quality will be of high importance. Still, the keypad or keyboard must be large enough to allow people to press one key at the time.

Figure 1 discloses a typical example of a state of the art mobile phone 1,
30 carried by a housing or chassis 2. The size of a keypad 4 and a display 3 basically sets the limit of how small the terminal 1 can be. However, to be able to work as a standard phone for voice interaction, the terminal 1 also includes a microphone 5 and a speaker 6, preferably arranged at opposite ends of the terminal 1. Figure 3 discloses a different embodiment of a state of the art communication terminal 1,
35 wherein the display 3 occupies a larger portion of the front side of the terminal. Several of the functions of the keypad 4 have been included in a graphical user interface applicable to the display 3, rendering a data input interface having less keys. Those keys 4 may also be moved to the side of the communication terminal in order to allow for the display 3 to occupy a larger portion of the front side of

terminal 1. A specific tool 8 may be provided for inputting data on a touch-sensitive screen of the display 3. Figs 1 and 3 show two typical examples of state of the art communication terminals 1, whereas the skilled persons will realise that combinations of the two are also well known as well as other designs.

5 With the development of the communication systems and the capabilities of multimedia functions, the demands on the sound quality from the terminals will also increase. In the next generation of terminals using W-CDMA technique, it will be possible to use a wider audio frequency band. The speaker of the terminal may also be used as a ringer instead of a traditional buzzer, for a single tone or polyphonic
10 ring signals, and as a hand free speaker built-in into the phone. Normally, these functions are performed by a second speaker mounted in the back of the phone, but combined speakers for two or all three of these functions exist.

In the state of the art communication terminal a terminal output 7 is mounted on the front of the terminal above the display with the speaker 6 immediately
15 behind the output 7, as shown in figs 1 and 3. This means that even with a smallest available speaker used today, with a diameter of about 13 mm, the terminal would be approximately this much longer in its longitudinal extension than what would have been the case if only the display 3 and/or keypad 4 had defined the length of the terminal 1. The antenna of the terminal is generally located at the upper portion
20 of the backside of the terminal, the lower backside being occupied by a battery. Placing the speaker 6 behind the display 3 would therefore increase the thickness of the terminal 1 since it would have to compete with the antenna for the relevant space.

The performance of the speaker is to a high extent dependent on the back
25 volume, i.e. the acoustic resonance cavity behind the speaker. For best performance, the back volume should be sealed. In a normal case the whole phone is used as back volume, but it is almost possible to seal a phone. As mentioned above, almost every phone today has the speaker position in the upper parts of the front of the terminal above the display and keyboard. This means that the height of the speaker, display
30 and the keyboard determines the length of the phone. Since the speaker performances is highly dependent on the dimension, reduction of the speaker size results in less good acoustics. There is also a general desire to have larger displays in the communication terminal, not just wider but also longer, and with the common layout of the keyboard such as disclosed in figure 1 and which people are used to,
35 the height of the terminal can basically not be reduced more than today without resulting drawbacks to the display 3 or keypad 4.

A solution to this problem of miniaturisation of communication terminals is proposed in WO 00/38475, in which the acoustic resonance chamber of the speaker is completely or partly located in the electromagnetic resonance chamber of the

antenna. The use of a single resonance chamber instead of two separate ones makes it possible to manufacture smaller communication devices. According to the proposed solutions the speaker is placed outside the resonance chamber, the backside of the speaker being connected to the resonance chamber by at least one acoustic channel. However, the arrangement of the speaker beside the resonance chamber has some drawbacks. First of all the acoustic channel has to be properly sealed. Furthermore, the speaker and chamber will both add to the thickness of the terminal, and at the same time the height of the speaker will contribute to the length of the terminal.

Summary of the invention

It is consequently an object of the present invention to overcome the deficiencies related to the state of the art communication terminal as recited above. More specifically, it is an object to provide a speaker arrangement for a communication terminal making it possible to decrease the outer terminal dimensions. According to the present invention, this object is fulfilled by communication terminal comprising a housing carrying therein a radio antenna element, a speaker, and a chamber acting as an electromagnetic resonance cavity for the antenna as well as an acoustic resonance cavity for the speaker. According to the invention, the speaker is mounted inside said chamber and is coupled to the outside of the housing through a sound outlet. By using the antenna cavity a good resonance chamber is provided for the speaker. Furthermore, by placing the speaker inside the cavity, the thickness contribution of the speaker is eliminated. Tests performed on a prototype apparatus have shown the surprising result that the speaker will not, or to a very little extent, affect the performance of the antenna.

In one embodiment, the communication terminal comprises a user interface on a front side of the housing, wherein said speaker is placed behind said user interface as seen from said front side. The user interface may be a display or a key pad. In such an embodiment, said sound outlet is preferably coupled to said speaker by a sound channel which extends from a channel inlet at the speaker. Furthermore, said sound channel preferably comprises at least one bent portion, such that the sound channel bends around said user interface and extends at said channel front outlet substantially perpendicular to said front side. Said sound channel may further be devised with a channel top outlet extending in a substantially longitudinal direction of the terminal at a top side of said housing.

In one embodiment, a ground plane defines a wall part of the chamber, through which wall part said sound channel outlet extends. The speaker is preferably mounted under said ground plane, as seen from said front side. The chamber may further be sealed, and have a substantially rectangular box shape.

In one embodiment, the speaker and the user interface are placed next to each other. However, a first part of the ground plane is located adjacent to the front part of the housing over the speaker antenna, and a second part of the ground plane is located under the user interface, wherein said first and second parts are connected
5 by a bent portion of the ground plane. This way the top portion of the terminal, comprising the antenna and the speaker, will basically be confined between the ground plane, i.e. the first part thereof, and the antenna element, rendering a very slim profile. The bent portion allows for the two parts of the ground plane to be arranged at different levels, though potentially parallel to each other. This way the
10 user interface, which has a certain thickness, can be positioned with its front face basically in the same plane as the front side of the top portion.

Preferably said antenna element comprises a substantially flat pattern of conductive material on an inner wall of said chamber.

The speaker may be devised to convey audio information such as speech to a
15 terminal user. Furthermore, the speaker may comprise a buzzer devised to act as a ringer by transmitting a predetermined sound signal to bring a user's attention to the terminal. Alternatively, said speaker may be a multi mode actuator devised to act as a ringer and a vibrator by transmitting predetermined sound signals or vibrations to bring a user's attention to the terminal.

20

Brief description of the drawings

Further features and advantages of the present invention will become more apparent from the following description of preferred embodiments, with reference to the accompanying drawings, on which

25 Fig 1 schematically shows a state of the art communication terminal of a first type;

Fig 2 schematically illustrates an embodiment of a communication terminal according to the present invention, otherwise designed according to the terminal type of fig 1;

30 Fig 3 schematically illustrates a second type of terminal according to the state of the art;

Figs 4 and 5 illustrate embodiments of communication terminals according to the present invention otherwise designed according to the terminal type of fig 3;

35 Fig 6 schematically illustrates a sectional side view of a portion of a communication terminal according to an embodiment of the present invention;

Figs 7A and 7B illustrate a state of the art communication terminal in a front view and a sectional side view; and

Figs 8A and 8B illustrate a terminal according to an embodiment of the invention in a front view and a sectional side view.

Detailed description of preferred embodiments

The present description refers to communications terminals as a device in which to implement the speaker configuration according to the present invention.

- 5 The communication terminal includes all mobile equipment devised for radio communication with a radio station, which radio station also may be a mobile terminal or e.g. a stationary base station. Consequently, the term "communication terminal" includes mobile phones, pagers, communicators, electronic organisers, smart phones, PDA:s (Personal Digit Assistants), vehicle-mounted radio
- 10 communication devices or the like, as well as portable laptop computers devised for wireless communication in for instance WLAN (Wireless Local Area Network). Furthermore, since the design and present invention is suitable for but not restricted to mobile use, the term "communication terminal" should also be understood as to include any stationary device arranged for radio communication, such as for
- 15 instance desk top computers, printers, fax machines and so on, devised to operate with radio communication with each other or some other radio station. Hence, although the structure and characteristics of the antenna design according to the invention is mainly described herein, by way of example, in the implementation in a mobile phone, this is not to be interpreted as excluding the implementation of the
- 20 inventive design in other types of radio terminals, such as those listed above. Furthermore, it should be emphasised that the term "comprising" or "comprises" when used in this description and in the appended claims to indicate included features, elements or steps, is in no way to be interpreted as excluding the presence of other features, elements or steps than those expressed or stated.

- 25 Fig 4 illustrates one embodiment of the present invention as seen from the front side. Fig 6 illustrates a portion of fig 4 as seen from section A - - A indicated in fig 4. It should be noted, though, that the drawing in fig 6 is equally applicable to an embodiment of the present invention as shown in for example fig 2.

- Consequently, fig 6 illustrates a portion of a communication terminal 11 as
- 30 seen from the side, with the front side 20 facing left in the drawing. It should be noted that fig 6 is highly schematic, intended to show the principal of an embodiment of the present invention and not necessarily a functioning design. Terminal 11 comprises a Printed Circuit Board (PCB) 24 carried in a chassis or housing 12. The PCB 24 supports the electronics 25 of terminal 11. At the front side
- 35 20 a display 13 is located, preferably devised as a LCD module (Liquid Crystal Display). As shown in the example of figs 4 and 5 the display 13 may occupy a major portion of the front side 20, whereas in a more traditional design according to fig 2, the display is mainly located at upper parts of the terminal. Behind the display 13 and PCB 24, a radio antenna 29 of terminal 11 is arranged. PCB 24 includes a

ground plane towards the antenna 29, which antenna is devised for reception and transmission of radio signals according to the established art. The specific design of the radio antenna 29, which may e.g. be a micro strip antenna or a PIFA antenna (Planar Inverted-F Antenna), is not of importance for the present invention, although the invention relates to antennas which demand a cavity or distance between the antenna element and the ground plane. In the illustrated embodiment of fig 6, however, the antenna 29 is some form of low profile flat antenna formed or placed on the inside of an antenna lid 27. The feeding connection of antenna 29 to the PCB is not shown, neither is a connection to the ground plane which may be included dependent on the antenna type. The antenna 29 is situated at a certain distance from the PCB 24, such that an electromagnetic resonance cavity 21 is located there between, in a manner well known in the art. A chamber 21 acting as the electromagnetic resonance cavity is preferably a sealed box defined between the antenna lid 27, the PCB 24, and side walls, and the chamber 21 is sealed by gaskets 26.

A speaker 16 is located inside chamber 21 and mounted adjacent PCB 24 with gaskets 26, such that the front side of speaker 16, illustrated in the drawing by the curved portion, is sealed from the cavity of chamber 21. This way, chamber 21 will also act as an acoustic resonance cavity for speaker 16. The front side of speaker 16 is coupled to the outside of the housing 12 through a sound channel 22 to an output opening 17 in housing 12. Sound channel 22 includes a channel inlet 28 forming an opening in the PCB 24 to the front side of speaker 16.

Consequently, speaker 16 is located behind the display 13, and the length or height of speaker 16 is not added to the total length of terminal 11. It should be noted though, that in an alternative design of communication terminal 11 (not shown) in which the display is arranged at the bottom of the phone near a microphone 15, and a key pad 14 is arranged at the top of the phone, speaker 16 would be located behind key pad 14 rather than display 13. By placing speaker 16 inside chamber 21, the thickness of 16 does not add to the total thickness of terminal 11, thereby rendering a smaller terminal.

By placing speaker 16, and cavity 21, behind the user interface, i.e. the display 13 or keypad 14, the height of speaker 16 does not add to the length of terminal 11. Instead, only the height of the outlet 17 of sound channel 22 will add to the length of the phone. This is shown for the first type of communication terminal 11 of fig 2, which should be compared to the state of the art terminal of fig 1. The terminal 11 of fig 2 is obviously shorter in the longitudinal direction than terminal 1 of fig 1. For the second type of terminal the inventive design is disclosed in figs 4 and 5. Comparing the embodiment of terminal 11 in fig 4 with the state of the art terminal 1 of fig 3, terminal 11 is clearly smaller. However, instead of making the

entire terminal smaller, it is of course possible to use the space otherwise occupied by a speaker to increase the user interface, in the example of fig 5 by including a larger display 13. In the embodiments of figs 4 and 5 as well as the state of the art terminals of fig 3, an auxiliary tool 8 may be used to interact with the phone by pressing touch sensitive areas of display 3, 13 in a manner well known in the art.

In order to port the audio signals from speaker 16 into the front side 20 of terminal 11, sound channel 22 comprises at least one bent portion 23, such that the sound channel bends round the user interface 13, 14 in front of speaker 16. Preferably sound channel 22 exits at the front side 20 of terminal 11 substantially perpendicular thereto, as illustrated by the arrow at outlet 17. In one embodiment the sound channel 22 further has a sound channel top outlet 19, exiting in a substantially longitudinal direction of terminal 11 at a top side of housing 12, as illustrated by the arrow at outlet 19. This outlet 19 may be used as a hands-free speaker outlet.

In Fig. 7A a state of the art terminal much like the one in Fig. 1 is shown from the front side. In Fig. 7B the same terminal is schematically illustrated from the side in a sectional view with the front side facing left. In this drawing a number of elements normally included in a radio communication terminal or disclosed. It should be emphasised, though, that the dimensions are merely exemplary to illustrate the contribution and advantage of certain features of this embodiment of the invention. Furthermore, connections between the different elements of the terminal are not shown. A ground plane 24 is arranged in the terminal extending longitudinally through a part, or substantially the entire body, of the terminal. Normally, this ground plane is a layer of a printed circuit boards carrying the electronics of the terminal. A speaker 6 is placed at the front side of the terminal, over the ground plane as seen from the front side. The back of the speaker is coupled to the cavity 21, placed behind the ground plane, through an opening in the ground plane as illustrated in the drawing. The back wall of cavity 21, i.e. the wall opposite to the ground plane, carries an antenna element, e.g. in the shape of a PIFA. A user interface comprises a display 3 and a key pad 4, and a microphone 5 is placed at the bottom of the terminal. A battery 9 is further included to supply the terminal electronics with electrical power.

In Figs 8A and 8B an embodiment of the present invention is disclosed, in which the speaker 16 is placed beside the user interface 13, rather than under as in the embodiments of Figs 2, 4, 5 and 6. In this embodiment there is no real sound channel, rather only an opening or outlet 17. The speaker 16 is placed inside the antenna cavity 21, in order to benefit from the same space for acoustic purposes, as previously described. At the top portion of the terminal, i.e. the portion comprising the speaker and the antenna, the thickness of the terminal is in this embodiment

basically defined by the distance between the antenna and the ground plane, since the thickness contribution from the speaker has been eliminated. Furthermore, even though the antenna cavity 21 has been partly occupied by the speaker, experimental laboratory tests on this design have surprisingly shown that the presence of the speaker will not result in reduced antenna performance if tuned properly.

The drawings of Figs 7B and 8B indicate that the entire terminal can be made thinner by implementation of this embodiment. Naturally, this is dependent on the dimensions of the user interface, the battery, other electronics, and so on, and the arrangement of these elements. However, Fig. 8B further shows a feature relating to the ground plane. A first, upper, part of the ground plane defines the front face of the terminal, although it is preferably covered by a housing directly adjacent to the ground plane 24. Since the user interface, e.g. the display 13, has a certain thickness, the ground plane has a bent portion between the speaker and the user interface, wherein the ground plane first bends downwards towards the back side of the terminal, and then bends back towards the lower end carrying the microphone 15. This way a second, lower, part of the ground plane is formed which extends in a plane closer to the back of the terminal than the first part. This makes room for the display 13 and the key pad 14 to be arranged over the ground plane, with their front sides substantially in the same plane as the top portion of the terminal, with the sound outlet 17 from the speaker. As is well known to the skilled person, the purpose of the antenna cavity is to place the antenna at a certain distance from the ground plane. For this reason it is likewise important in the present embodiment that the bent portion is not too close to the antenna, such that the uppermost edge of the lower part of the ground plane is located too close to the antenna. In other words, a certain minimum distance between the antenna and ground can be defined, and no part of the ground plane may be placed closer to the antenna than that.

Chamber 21 acting as a cavity for both acoustic resonance and electromagnetic resonance may be a rectangular box, which makes it easy to seal by means of gaskets 26. As mentioned before, antenna 29 may be a separate conductive element placed on the inside of the antenna lid 27 but may also be a conductive pattern coated on the inside of lid 27.

The present invention brings about several advantages, thanks to the inventive idea to mount the speaker inside the antenna cavity, where the antenna cavity is a sealed box. The front side of speaker 16 is ported to the terminal front by a thin channel 22. By mounting the speaker 16 in a sealed box 21 it is possible to use a smaller speaker 16 than normal. This solution can also be used when the speaker 16 performs in more than one mode. Consequently, speaker 16 can be used as a ringer in ringer mode, and also as a hands-free speaker in speakerphone mode. Porting the speaker to the front of the terminal by use of a sound channel 22 makes

it possible to reduce the length of terminal 11 by five to ten millimetres and still keep the thickness at a minimum. Also the weight of the terminal 11 may be reduced due to the smaller terminal dimension. The antenna cavity of chamber 21 is used to create a distance between antenna 29 and the ground plane of PCB 24 in order to improve the bandwidth of the antenna, as is well known in the prior arts. Otherwise this cavity is normally not used for anything else. Furthermore, by placing speaker 16 inside cavity 21, the function of chamber 21 as an electromagnetic cavity will not be effected in any negative way, and will therefore not disturb the performance of terminal 11.

The foregoing has described the principals, preferred embodiments and modes of operation of the present invention. However, the invention should not be construed as being limited to the particular embodiments discussed above. For example, it is well known in the state of the art to design mobile or cellular phones in a foldable housing 12. Still, the desire to have small terminals is equally applicable to such a design, and so is the proposed solution of the present invention. Thus, the above described embodiments should be regarded as illustrative rather than restrictive, and it should be appreciated that variations may be made in those embodiments by those skilled in the arts without departing from the scope of the present invention as defined in the appended claims.

Claims

1. Communication terminal (11) comprising a housing (12) carrying therein a radio antenna element (27), a speaker (16), and a chamber (21) acting as an
5 electromagnetic resonance cavity for the antenna and as an acoustic resonance cavity for the speaker, **characterised in** that said speaker is mounted inside said chamber and is coupled to the outside of said housing through a sound outlet (17).
2. The communication terminal as recited in claim 1, **characterised in** that it
10 comprises a user interface (13,14) on a front side (20) of the housing, and in that said speaker is placed behind said user interface as seen from said front side.
3. The communication terminal as recited in claim 2, **characterised in** that said
15 sound outlet is coupled to said speaker by a sound channel (22) which extends from a channel inlet (28) at the speaker.
4. The communication terminal as recited in claim 3, **characterised in** that said
20 sound channel comprises at least one bent portion (23), such that the sound channel bends around said user interface and extends at said channel front outlet substantially perpendicular to said front side.
5. The communication terminal as recited in claim 3, **characterised in** that said
25 sound channel further has a channel top outlet (19) extending in a substantially longitudinal direction of the terminal at a top side of said housing.
6. The communication terminal as recited in claim 2, **characterised in** that said
user interface is a display (13).
7. The communication terminal as recited in claim 2, **characterised in** that said
30 user interface is a key pad (14).
8. The communication terminal as recited in any of the previous claims,
characterised in that a ground plane (24) defines a wall part of the chamber,
through which wall part said sound channel outlet extends.
35
9. The communication terminal as recited in claim 8, **characterised in** that said
speaker is mounted under said ground plane, as seen from said front side.
10. The communication terminal as recited in claim 9, **characterised in** that a first

part of the ground plane is located adjacent to the front part of the housing over the speaker antenna, and a second part of the ground plane is located under the user interface, wherein said first and second parts are connected by a bent portion of the ground plane.

5

11. The communication terminal as recited in any of the previous claims, **characterised in** that said chamber is sealed (26).

12. The communication terminal as recited in any of the previous claims,
10 **characterised in** that said chamber has a substantially rectangular box shape.

13. The communication terminal as recited in any of the previous claims, **characterised in** that said antenna element comprises a substantially flat pattern of conductive material on a wall (29) of said chamber.

15


14. The communication terminal as recited in any of the previous claims, **characterised in** that said speaker is devised to convey audio information such as speech to a terminal user.

20 15. The communication terminal as recited in any of the previous claims, **characterised in** that said speaker is devised to act as a ringer by transmitting a predetermined sound signal to bring a user's attention to the terminal.

16. The communication terminal as recited in any of the claims 1 - 14,
25 **characterised in** that said speaker comprises a buzzer devised to act as a ringer by transmitting a predetermined sound signal to bring a user's attention to the terminal.

17. The communication terminal as recited in any of the claims 1 - 14, **characterised in** that said speaker is a multi mode actuator devised to act as a
30 ringer and as a vibrator by transmitting predetermined sound signals or vibrations to bring a user's attention to the terminal.

1/4

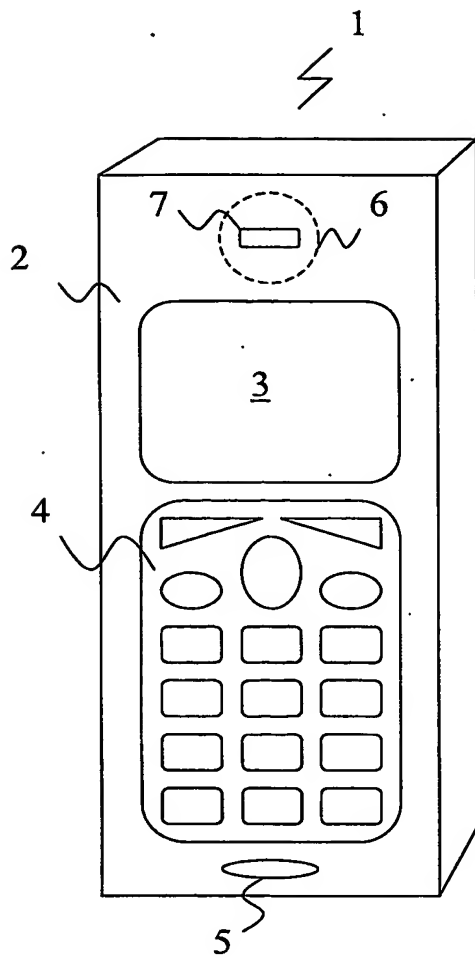

PRIOR ART

Fig. 1

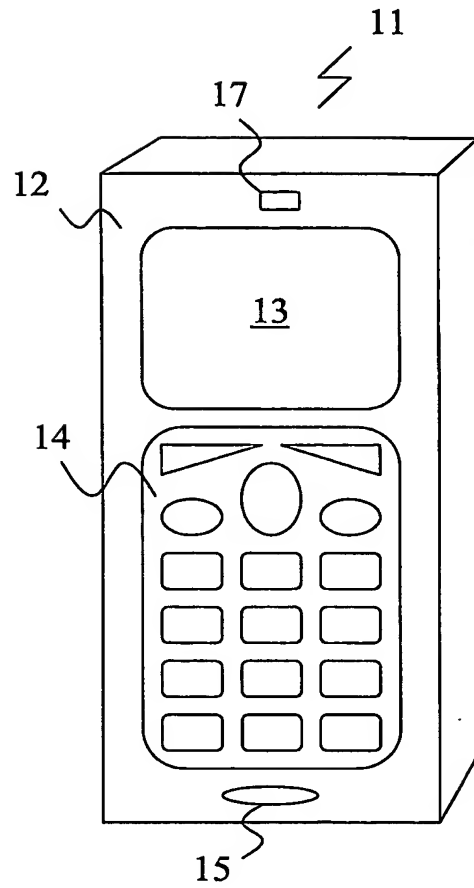


Fig. 2

2/4

Fig. 3

PRIOR
ART

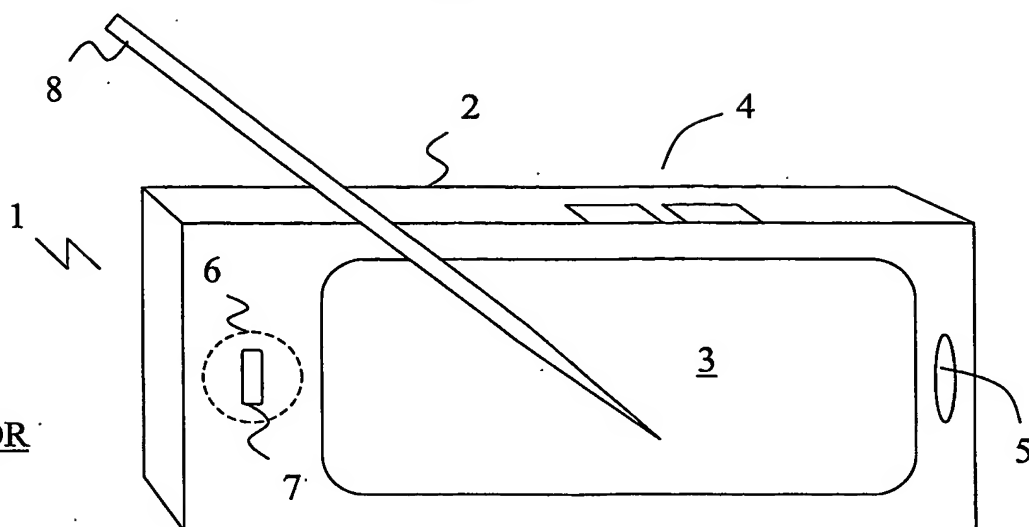


Fig. 4



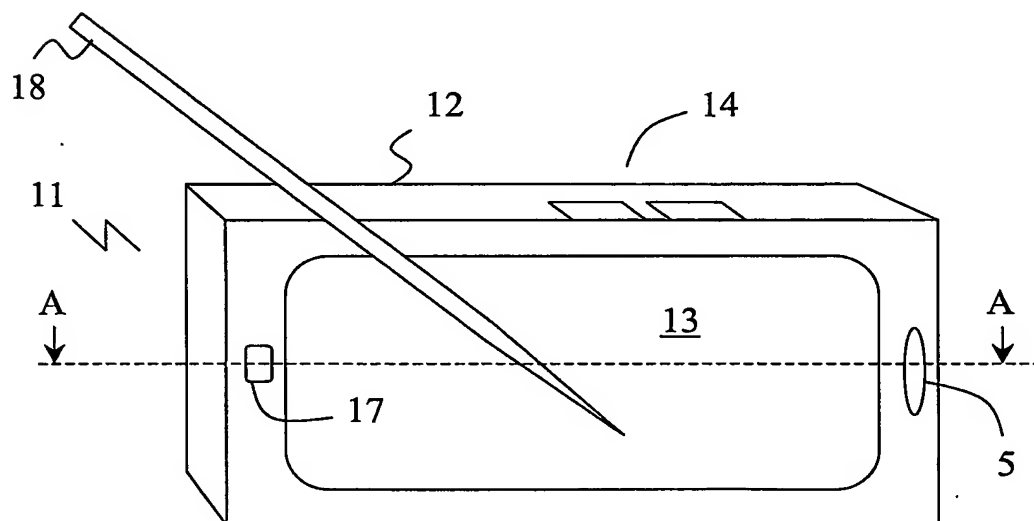


Fig. 5

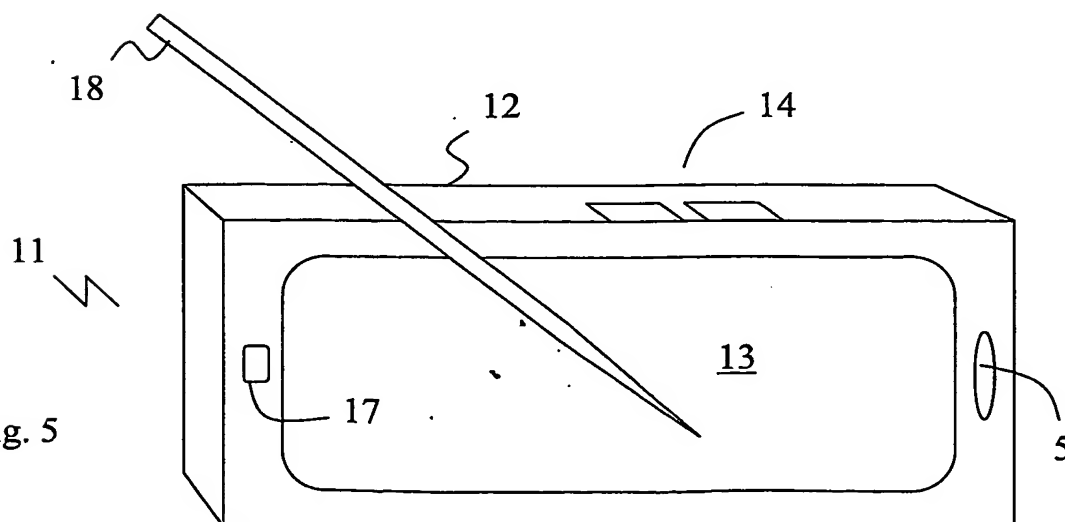

A -- A

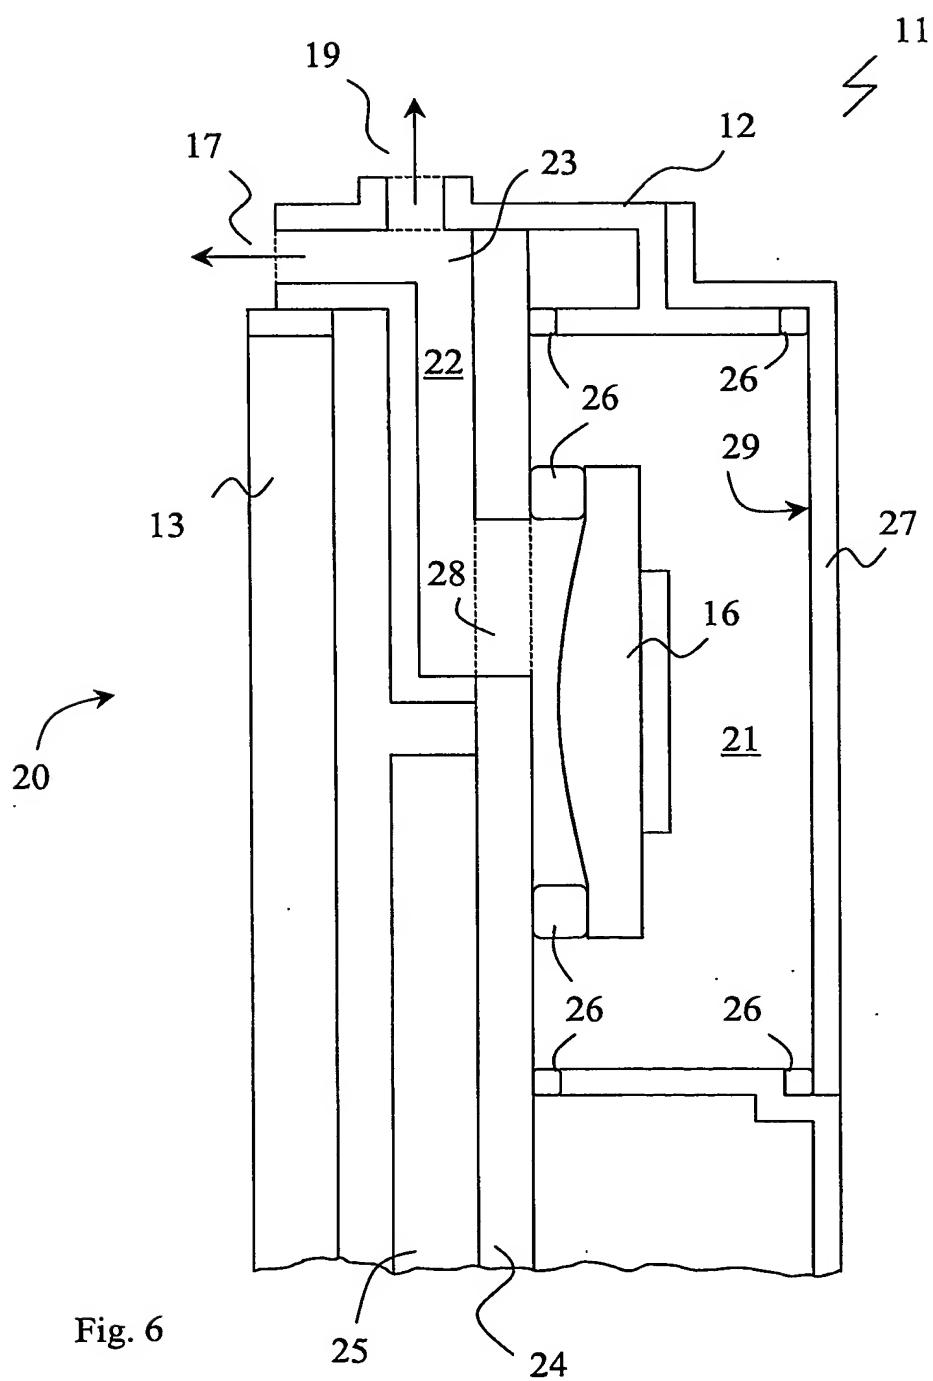

4/4

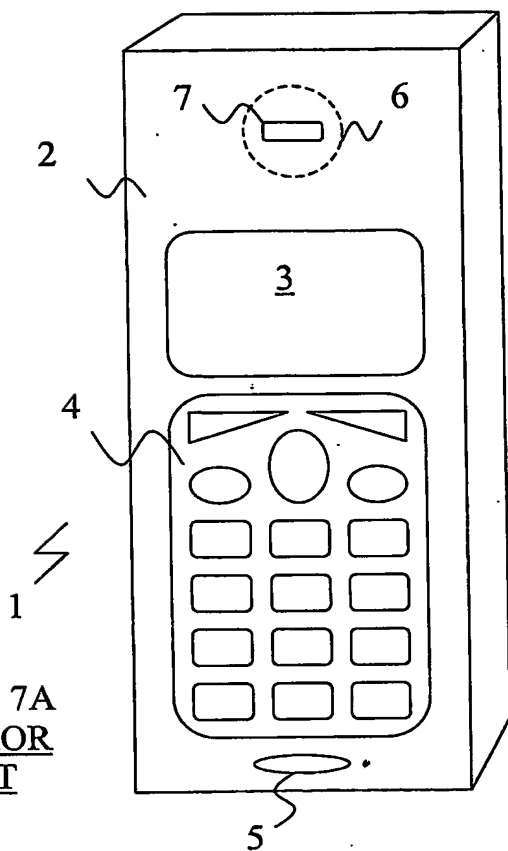


Fig. 7A
PRIOR
ART

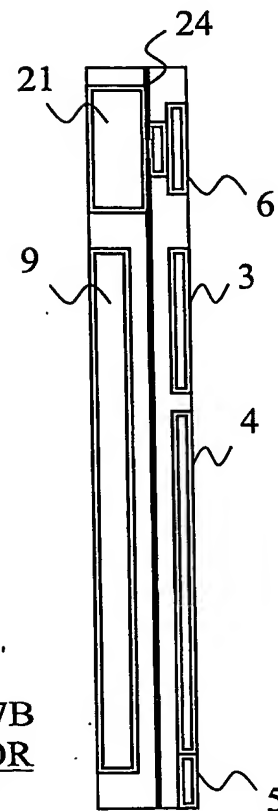


Fig. 7B
PRIOR
ART

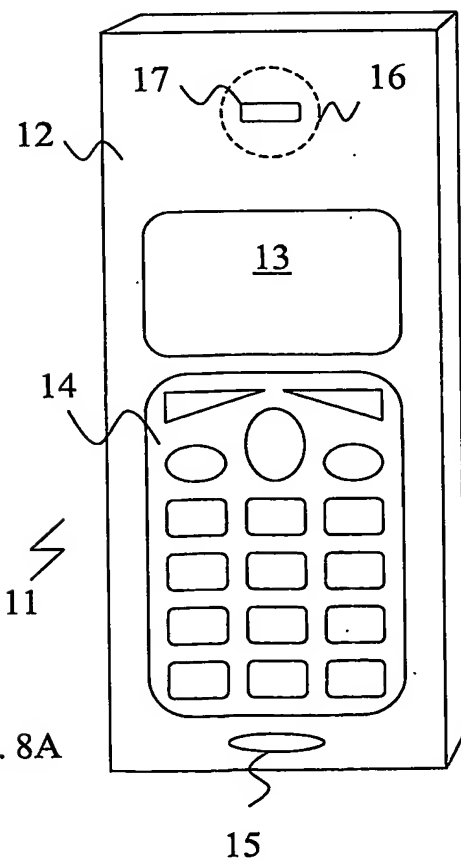


Fig. 8A

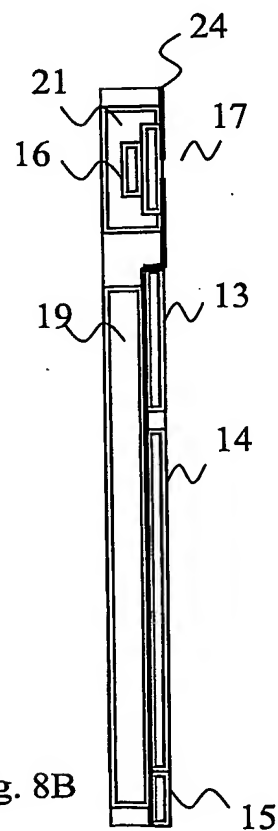


Fig. 8B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 06724

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04R1/02 H04M1/02 H04M1/03

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04R H04M H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 184 936 A (NOKIA MOBILE PHONES LTD) 6 March 2002 (2002-03-06)	1,8-17
Y	paragraph '0016! - paragraph '0019! figures 2-4	2-7
Y	WO 01 01591 A (KONINKL PHILIPS ELECTRONICS NV ;YAMAMOTO SHIGERU (NL)) 4 January 2001 (2001-01-04) abstract page 1, line 24 -page 2, line 10 page 3, line 16 - line 22 page 4, line 20 - line 27; figures 1,2	2-7
A	US 6 411 719 B1 (OLSSON MATS ET AL) 25 June 2002 (2002-06-25) abstract; figure 3	2-7
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

21 August 2003

Date of mailing of the international search report

01/09/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fülöp, I

INTERNATIONAL SEARCH REPORT

International Application No

PCT/E/ /06724

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 310 559 A (NOKIA MOBILE PHONES LTD) 27 August 1997 (1997-08-27) abstract; figures 4,5 ---	2-7
A	DE 100 52 909 A (SIEMENS AG) 8 May 2002 (2002-05-08) abstract; figures 2,3 -----	1,8-17

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 06724

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1184936	A	06-03-2002	FI 20001903 A CN 1344043 A EP 1184936 A1 JP 2002124811 A US 2002047807 A1	01-03-2002 10-04-2002 06-03-2002 26-04-2002 25-04-2002
WO 0101591	A	04-01-2001	JP 2001016674 A WO 0101591 A1	19-01-2001 04-01-2001
US 6411719	B1	25-06-2002	AU 4963600 A CN 1351812 T EP 1183903 A1 JP 2003500913 T WO 0070906 A1 SE 9901794 A	05-12-2000 29-05-2002 06-03-2002 07-01-2003 23-11-2000 19-11-2000
GB 2310559	A	27-08-1997	NONE	
DE 10052909	A	08-05-2002	DE 10052909 A1 WO 0235810 A1 EP 1329085 A1	08-05-2002 02-05-2002 23-07-2003